

ECOLIFT Pallet Truck

TOTALSOURCE®

FEATURED PRODUCTS

Standard Features for Ecolift model.

- Safety spring loaded handle allows load to be lowered while in motion to act as a brake
- High Tensile steel frame and seamless forks
- Entry and exit rollers for easy entry and exit of pallets
- Painted quality safety color after anti-trust treatment
- 230° pivot action enables maneuvering in compact areas
- Lifting, neutral and lowering positions with handle
- 5,500 capacity
- Spring-a-matic handle self returns
- Fork length: 48"
- Fork width: 6"
- Width across forks: 27"/20.5"
- Space Between forks: 15"/8.5"
- Body Length (including pump): 16"
- Steer wheels: 7" x 2"
- Load wheels: 2.9" x 3.625"
- Lowered height of forks: 2.9"
- Raised height of forks: 7.75"
- Aproximate weight: 202/192 lbs
- One year standard warranty
- Two year warranty on hydraulic unit by replacement part



EO5500

27" x 48" (686mm x 1219mm)

Single poly steer & load wheels

EO5501

20.5" x 48" (521mm x 1219mm) single poly steer & load wheels


EO5500, EO5501 HANDLE ASSEMBLY

Hand Lowering Control-3 positions

- Lifting-neutral-lowering with handle or foot pedal means extra safety
- Neutral allows pumping at the most convenient angle to the operator and free handle movement when the truck is in motion
- The handle returns automatically to the vertical position

BRAKE

- Safety spring-loaded handle allows load to be lowered while in motion to act as a brake

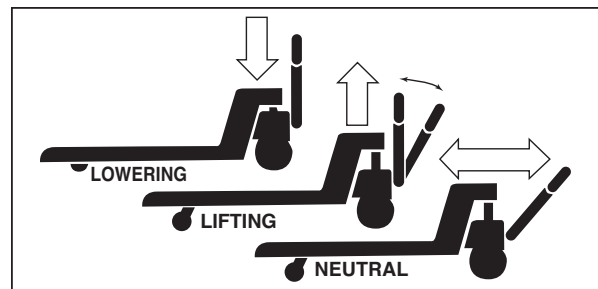

United States
800 255 4109
Fax 913 764 7278

International
913 768 3099
Fax 913 829 6206

Canada (ONT)
800 509 7668
Fax 905 564 5717

Canada (BC)
888 661 8611
Fax 604 944 7024

Mexico
+52 55 5861 8550
Fax +52 55 5819 3004

www.smhco.com